

# LASHING TRACKS

Special Versions on demand


## WISTRA Lashing Track Systems

These systems are made of different materials as there are steel, galvanized steel, stainless steel and aluminium. They are used for compact vehicles, lorries, containers etc. in

connection with WISTRA- shoring- /cargo- and decking beams as well as frame welts and lashing systems.

Mechanical Protection

### Anchor Combi Track

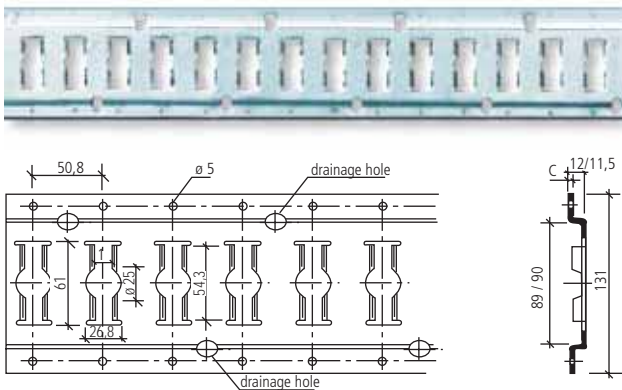


Order-No.:	Material	Measurements [mm] C
21 3009 30 00 12	galvanized steel	3,0
21 3009 25 00 12	galvanized steel	2,5
21 3009 30 00 14	hot-dip galvanized steel	3,0
21 3009 25 00 14	hot-dip galvanized steel	2,5
21 3009 30 00 20	aluminium*	3,0
21 3009 25 00 30	stainless steel*	2,5

Standard Length: 3050 mm

Weight: 7,5 kg

\* on demand

### Anchor Combi Track, sicked

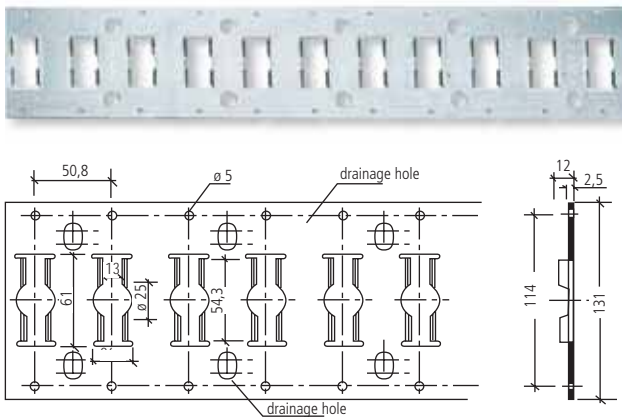


Order-No.:	Material
21 3109 25 00 12	galvanized steel
21 3109 25 00 30	stainless steel*

Standard Length: 3050 mm

Weight: 7,4 kg

\* on demand

### Anchor Combi Track, vertical

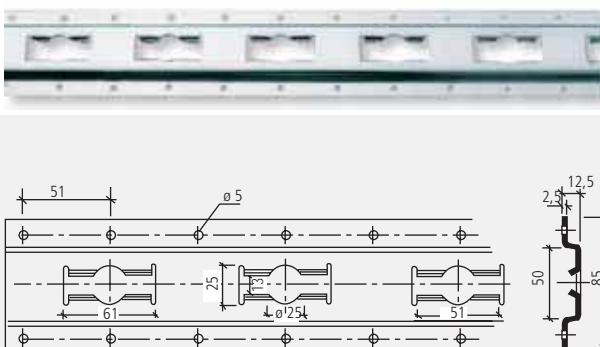

Order-No.:	Material
21 2010 25 08 12	galvanized steel

Standard Length: 2438 mm


Weight: 4,0 kg

## Combi Lashing Tracks

Order-No.:	Material	Measurements [mm]	
		C	G
21 3008 30 20 12	galvanized steel	3,0	20
21 3008 30 25 12	galvanized steel	3,0	25
21 3008 25 20 12	galvanized steel	2,5	20
21 3008 25 25 12	galvanized steel	2,5	25
21 3008 30 20 14	hot-dip galvanized steel	3,0	20
21 3008 30 25 14	hot-dip galvanized steel	3,0	25
21 3008 25 20 14	hot-dip galvanized steel	2,5	20
21 3008 25 25 14	hot-dip galvanized steel	2,5	25
21 3008 30 20 20	aluminium*	3,0	20
21 3008 30 25 20	aluminium*	3,0	25
21 3008 25 20 30	stainless steel*	2,5	20
21 3008 25 25 30	stainless steel*	2,5	25

Standard Length: 3000 mm  
Weight: 7,5 kg

\* on demand

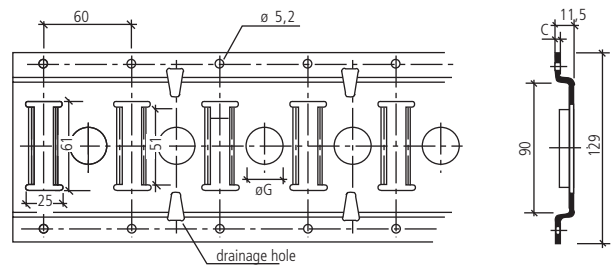


Mechanical Protection

## Combi Lashing Tracks

Order-No.:	Material	Measurements [mm]
		G
21 3108 25 20 12	galvanized steel	20
21 3108 25 25 12	galvanized steel	25
21 3108 25 20 14	hot-dip galvanized steel	20
21 3108 25 25 14	hot-dip galvanized steel	25
21 3108 25 20 30	stainless steel*	20
21 3108 25 25 30	stainless steel*	25

Standard Length: 3000 mm  
Weight: 7,4 kg


\* on demand

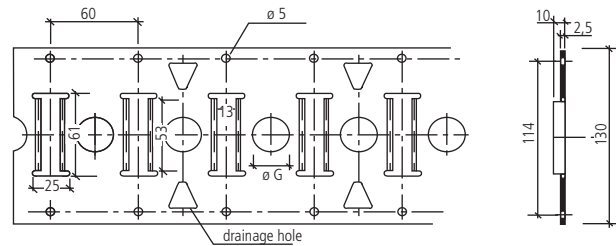

## Round Hole Lashing Tracks

Order-No.:	Material	Measurements [mm]	
		C	G
21 1805 12 25 12	galvanized steel	2,0	25


Standard Length: 3050 mm  
Weight: 3,6 kg

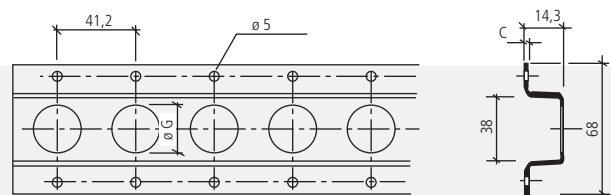

# LASHING TRACKS

Special Versions on demand

## Round Hole Lashing Tracks

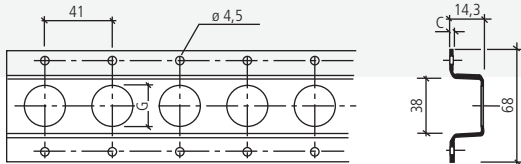


Order-No.:	Material	Measurements [mm]	
		C	G
21 1805 18 25 12	galvanized steel	1,8	25
21 1805 18 20 12	galvanized steel	1,8	20
21 1805 20 25 12	galvanized steel	2,0	25
21 1805 20 20 12	galvanized steel	2,0	20

Standard Length: 2993 mm

Weight: 3,6 kg

Mechanical Protection

## Round Hole Lashing Tracks with nose

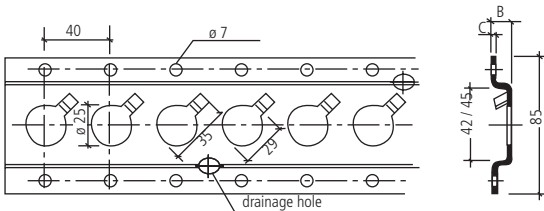


Order-No.:	Material	Measurements [mm]	
		C	B
21 1806 25 12 12	galvanized steel	2,5	11,5
21 1806 25 15 12	galvanized steel	2,5	15,0
21 1806 20 15 52	galvanized steel	2,0	15,0
21 1806 30 12 12	galvanized steel	3,0	12,0
21 1806 20 12 30	stainless steel*	2,0	12,0
21 1806 20 15 30	stainless steel*	2,0	15,0

Standard Length: 3000 mm

Weight: 3,6 kg

\* on demand

## Round Hole Lashing Tracks

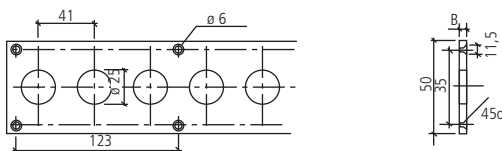

Order-No.:	Material	Measurements [mm]	
		C	G
21 3004 50 25 12	galvanized steel	B = 5	
21 3004 60 25 20	aluminium*	B = 6	

Standard Length: 2990 mm


Weight: 4,2 kg

\* on demand

## Keyhole Lashing Track - horizontal

Order-No.:	Material
21 1803 20 08 52	galvanized steel


Standard Length: 3050 mm  
Weight: 5,0 kg

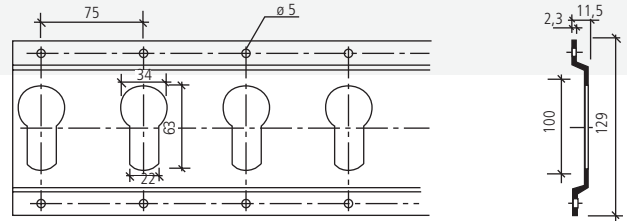

## Keyhole Lashing Track - vertical

Order-No.:	Material
21 1803 20 01 52	galvanized steel


Standard Length: 2032 mm  
Weight: 2,6 kg

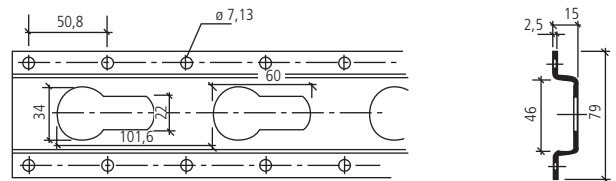

## Lashing track with pins

Order-No.:	Material
21 4710 20 30 20	special aluminium alloy with anti-ram profile


width: 23 mm (incl. protection profile)  
height: 66 mm (incl. protection profile)  
Standard Length: 5760 mm  
Weight: 7,6 kg  
bolt diameter 8 mm, pitch 120 mm  
Suitable endfittings:  
flat hook with safety device 14000 00 025 00  
shoring beam with slotted faucet version 49

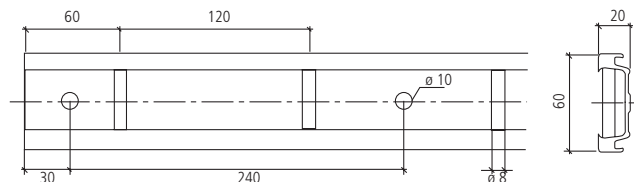

## Protection Wedge

to avoid injuries and damaged goods

Order-No.:	
21 2109 95 12 40	for Lashing Tracks 3008; 3009; 1803 H
21 2106 50 12 40	for Lashing Tracks 1806

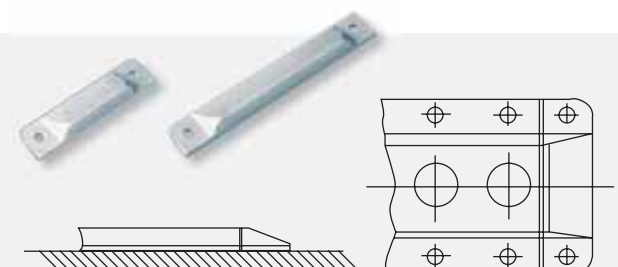

Mechanical Protection